

Hi-Mo X10 Explorer specification

Electrical Characteristics STC : AM1.5 1000W/m2 25°C NOCT : AM1.5 800W/m2 20°C 1m/s Test uncertainty for Pmax: ±3%

Module Type	LR7-54HVH-475M		LR7-54HVH-480M		LR7-54HVH-485M		LR7-54HVH-490M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Max Power (Pmax/W)	475	362	480	365	485	369	490	373
Open Circuit Voltage (Voc/V)	40.18	38.18	40.29	38.29	40.40	38.39	40.52	38.51
Short Circuit Current (Isc/A)	15.03	12.08	15.13	12.16	15.23	12.24	15.33	12.32
Voltage at Maximum Power (Vmp/V)	33.16	31.52	33.28	31.63	33.40	31.74	33.51	31.85
Current at Maximum Power (Imp/A)	14.33	11.49	14.43	11.57	14.53	11.65	14.63	11.73
Module Efficiency (%)	23.3		23.5		23.8		24.0	

- 15 year Warranty for Materials and Processing
- 30 year Warranty for Extra Linear Power Output

- Suitable for Distribution Market
- Highest efficiency with the best energy generation performance
- TaiRay wafer & BC technology enhances high product reliability
- Smart manufacturing & LONGi product lifecycle standards deliver exceptional product quality

Mechanical Parameters

Cell Orientation	108 (6×18)
Junction Box	IP68, three diodes
Output Cable	4mm2, +400, -200mm/±1200mm (length can be customized)
Glass	Single, 3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Weight	21.6kg
Dimension (W x H x D)	1134mm x 1800mm x 30mm
Packaging	36pcs per pallet/216pcs per 20'GP/864pcs per 40'HC

Operating Parameters

Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	IEC Class C

Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	M2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.200%/°C
Temperature Coefficient of Pmax	-0.260%/°C

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730
ISO9001:2015: ISO Quality Management System
ISO14001: 2015: ISO Environment Management System
ISO45001: 2018: Occupational Health and Safety
IEC62941: Guideline for module design qualification and type approval

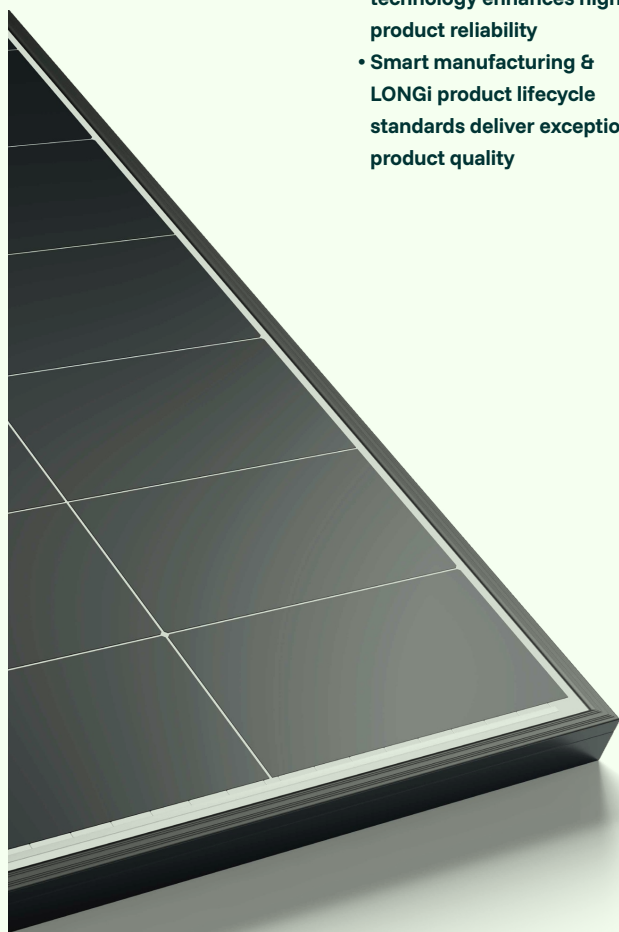

Specifications included in this datasheet are subject to change without notice.

LONGi reserves the right of final interpretation. (20241118 BGV02 Draft)